

Black Lift Lock (UK)



- Innovative Lift Lock mechanism for fast, safe folding and stacking
- Individually traceable with unique Data Matrix code
- Extremely space efficient: only 28 mm high when folded
- Optimised for fresh fruit and vegetables



A sturdy, food-safe reusable packaging container (RPC) suitable for fresh fruit and vegetables. Tough and durable, its design ensures the best possible temperature control, maintaining product freshness and quality throughout the supply chain. It's also ideal for point-of-sale (POS) display. Available in 10 sizes.

Your Benefits

Protects your produce

- Sturdy construction and secure stacking protect products
- Compared with single-use packaging, IFCO RPCs reduce packaging-related damage to fresh fruit and vegetables by over 96%
- Maintains maximum product freshness and quality throughout the supply chain

Efficient handling

- Fast manual or automated unfolding
- Easy stacking with minimum effort
- Ergonomic design with handles on four sides

Ideal for in-store display

- Shoppers prefer IFCO RPCs to single-use packaging for display
- Quick and easy to replace in fresh produce department, saving time and money

Helps you operate more sustainably

- Reusable over many years, eliminating waste
- After useful life, material is recycled into new RPCs
- Reduced waste, pollution and use of natural resources

Standardised for maximum convenience

- Erected crates are compatible with other IFCO RPC types
- Compatible with all standard pallets
- Optional graphics and labels for branding available
- Pooled and serviced through IFCO's network of service centres

Dimensions and specifications

		Dimensions*			Logistics		Weight*	Max. load
		L x W x H (mm)	H (mm)	L x W x H (mm)	Maximum load height 2,350 mm**		Tare in g	In kg
Types		External dimensions	Stacking height	Usable internal dimensions	Number of trays per pallet***	Number of layers		
43xx	BLL4310	400 x 300 x 119	110	377 x 272 x 107	190	19	840	5
	BLL4314	400 x 300 x 162	153	377 x 272 x 150	140	14	985	7
	BLL4320	400 x 300 x 226	219	377 x 272 x 216	100	10	1,310	8
64xx	BLL6408	600 x 400 x 93	86	577 x 372 x 83	125	25	1,255	6
	BLL6410	600 x 400 x 117	110	577 x 372 x 107	100	20	1,360	10
	BLL6413	600 x 400 x 152	145	577 x 372 x 141	75	15	1,540	12
	BLL6416	600 x 400 x 184	177	577 x 372 x 174	60	12	1,680	15
	BLL6418	600 x 400 x 199	192	577 x 372 x 189	55	11	1,725	18
	BLL6420	600 x 400 x 216	209	577 x 372 x 206	50	10	1,830	20
	BLL6424	600 x 400 x 238	231	577 x 372 x 228	45	9	2,000	20

*Dimensional and weight tolerance for 43XX is +/-2% and for 64XX +/-1.5% | ** Includes height of ISO pallet | *** Full trays

Other information applicable to all types

Material	Polypropylene	Colour	Black	Temperature range	Usable from -10°C to +60°C	
Properties	Guaranteed long-life colour intensity, UV radiation resistant, food safe					
Folded stacking height	28 mm					
Order quantity per truck	Type 43xx (52 pallets) = 17,160		Type 64xx (26 pallets) = 9,360			
Quantity RPCs per ISO pallet ex depot	Type 43xx (Height 2 x 1,093 mm**) = 330 / 660** Type 64xx (Height 2,185 mm*) = 360					

* Includes height of standard ISO pallet | ** Double stacked | RPC = Reusable Packaging Container


Notes on use

Unfolding



- 1** Pull up long sides by gripping a handle with each hand
- 2** Pull short side walls up with the handle until they lock into place
- 3** Check each corner that locking tabs are engaged

Folding

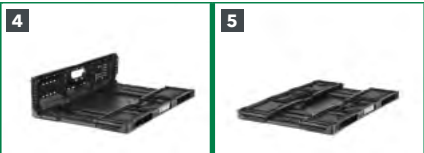

- 4** Unlock short side walls by lifting the locking bars (lift locks) and fold them down
- 5** Fold long sides down onto the folded short sides

Stacking



IFCO SYSTEMS UK Ltd.

For more information, visit IFCO.com.

All information without guarantee and subject to change without notice.

© IFCO-DS1003-UK-EN | 02/2024 | All Rights Reserved

