

Black Lift Lock and I-Series



- Well-ventilated design maintains product freshness and quality
- Suitable for both refrigerated and dry displays
- Rounded inner corners protect delicate products
- Optimized for fresh fruit, vegetables and bakery products



A series of sturdy, foodsafe reusable packaging containers (RPCs) suitable for all fresh fruit, vegetables, meat, eggs and bakery products. Tough and durable, their design ensures the best possible temperature control, maintaining product freshness and quality throughout the supply chain. Also ideal for point-of-sale (POS) display. Available in nine sizes.

Your benefits

Protecting your produce

- Sturdy construction and secure stacking protect products
- Made from UV-resistant, food-safe polypropylene
- Maintaining maximum product freshness and quality throughout the supply chain

Efficient handling

- Fast manual or automated unfolding
- Easy stacking with minimum effort
- Ergonomic design with handles on two sides

Ideal for in-store display

- Shoppers prefer IFCO RPCs to single-use packaging for display
- Quick and easy to replace in merchandise, saving time and money

Helping you operate more sustainably

- Reusable over many years, eliminating waste
- After useful life, 100% of material is recycled into new RPCs
- Reduced waste, pollution and use of natural resources

Standardized for maximum convenience

- Compatible with all other IFCO RPCs
- Compatible with all standard pallets
- Provides a standard footprint essential for automation
- Pooled and serviced through IFCO's network of service centers

Dimensions and specifications*

	Dimensions					Inbound Pallet			Outbound Pallet	
	L x W = 60 x 40 cm (23.6 x 15.8 in)					Pallet Height = 6 in			Pallet Height = 6 in	
	Model	External Height		Internal Height		Av. Weight Empty (lb)	Folded RPCs/Pallet (qty)	Folded Pallet Height (in)	Max packed RPCs/Pallet (qty)	Max Pallet Height (in)
IFCO Series	6408	10.3	4.1	8.9	3.5	3.1	165	53.6	110	85
	6411	13.3	5.2	12	4.7	3.3	165	53.6	85	90
	6413	14.8	5.8	13.9	5.5	3.5	165	53.6	75	89
	6416	18.4	7.2	17.1	6.7	3.9	165	53.6	60	89
	6419	21.0	8.3	19.7	7.8	4.2	165	53.6	55	94
	6423	24.8	9.8	23.1	9.1	4.9	105	53.8	45	91
	6425	27.3	10.8	25.6	10.1	5.3	105	53.8	40	90
Lift Lock Series	6408N/LL	10.3	4.1	8.9	3.5	2.8	195	53.8	110	87
	6411N/LL	13.4	5.3	12.0	4.7	3.2	195	53.8	85	89
	6413N/LL	14.9	5.9	13.9	5.5	3.4	195	53.8	75	88
	6416N/LL	18.5	7.3	17.1	6.7	3.8	195	53.8	60	89
	6419N/LL	21.1	8.3	19.7	7.8	4.2	195	53.8	55	92
	6423N/LL	24.5	9.7	23.1	9.1	4.6	125	53.4	45	90
	6425N/LL	27.0	10.6	25.6	10.1	5.0	125	53.4	40	88
	6428N/LL	29.0	11.4	27.4	10.8	5.5	105	53.4	40	95
6429N/LL	29.1	11.5	27.7	10.9	5.3	125	53.4	40	95	

* Actual dimensions may vary

	Palletised Height (in inches; pallet = 6 in)																	
	Qty/Pallet	30	35	40	45	50	55	60	65	70	75	80	85	90	95	100	105	110
IFCO Series	6408	28	32	36	40	43	47	51	55	58	62	70	73	77	81	85		
	6411	36	40	45	50	55	60	65	70	75	80	85	90					
	6413	39	45	50	56	61	67	72	78	83	89							
	6416	48	55	61	68	75	82	89										
	6419	54	62	70	78	86	94											
	6425	69	79	90														
	6429	73	84	95														
Lift Lock Series	6408N/LL	28	32	35	39	43	47	50	54	58	61	65	69	72	76	80	83	87
	6411N/LL	35	40	45	50	55	60	65	70	75	80	84	89					
	6413N/LL	39	44	50	55	61	66	72	77	83	88							
	6416N/LL	47	54	61	68	75	82	89										
	6419N/LL	54	62	70	77	85	92											
	6423N/LL	62	71	80	90													
	6425N/LL	68	78	88														
	6428N/LL	73	84	95														
6429N/LL	73	84	95															

IFCO SYSTEMS US, LLC

For more information, visit IFCO.com.

All information without guarantee and subject to change without notice.

© IFCO-DS1005-US-EN | 06/2022 | All Rights Reserved



Instructions for use

Opening – small sizes (6408–6419)




- 1 Grasp the short-side handles and pull outward
- 2 Open fully and the walls will lock in place

Opening – large sizes (6423–6429)



- 1 Grasp the long-side walls and lift
- 2 Grasp the short-side handles and pull outward
- 3 Open fully and the walls will lock in place

Stacking

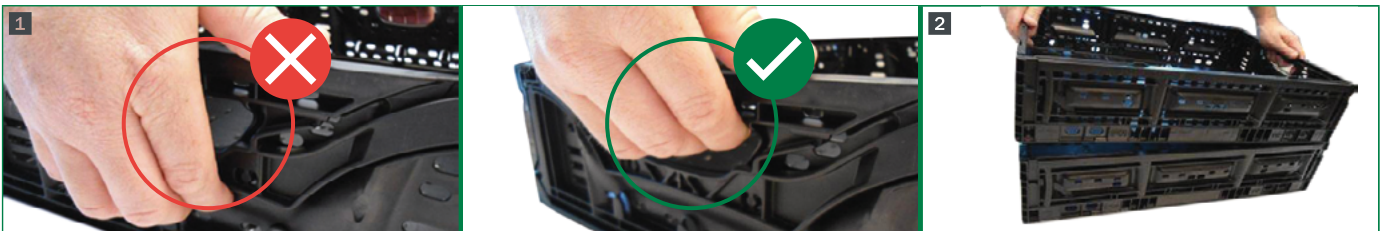

- 1 Grab the handle and lift to stack. Do not grab the lift latch or locks will disengage
- 2 Align RPCs and place on top of stack. As with all RPCs, latches must be fully engaged for pallet security, particularly at lower levels

Closing



- 1 Grasp the short-side handles and pull outward

IFCO SYSTEMS US, LLC

For more information, visit IFCO.com.

All information without guarantee and subject to change without notice.

© IFCO-DS1005-US-EN | 06/2022 | All Rights Reserved

